

| REV. | DESCRIPTION | DATE | BY |
|------|-------------|------|----|
| | | | |



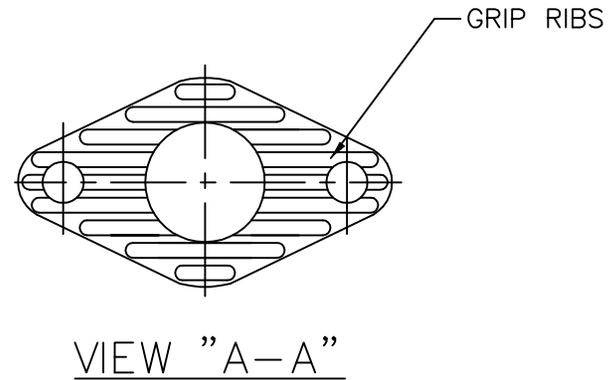


TABLE 1

| PART NUMBER | MODEL | RATED AXIAL LOAD-LBS | DEFLECTION AT RATED LOAD-INCHES |
|----------------|---------------|----------------------|---------------------------------|
| 114A-100411-01 | RP1-BLUE-WR | 35 | 0.20 |
| 114A-100411-02 | RP1-BROWN-WR | 45 | 0.20 |
| 114A-100411-03 | RP1-RED-WR | 70 | 0.20 |
| 114A-100411-04 | RP1-GREEN-WR | 120 | 0.20 |
| 114A-100411-05 | RP1-GRAY-WR | 250 | 0.20 |
| 114A-100411-06 | RP1-PURPLE-WR | △ | 0.20 |

AXIAL TO RADIAL SPRING RATE (K) RATIO 3:1 NOMINAL

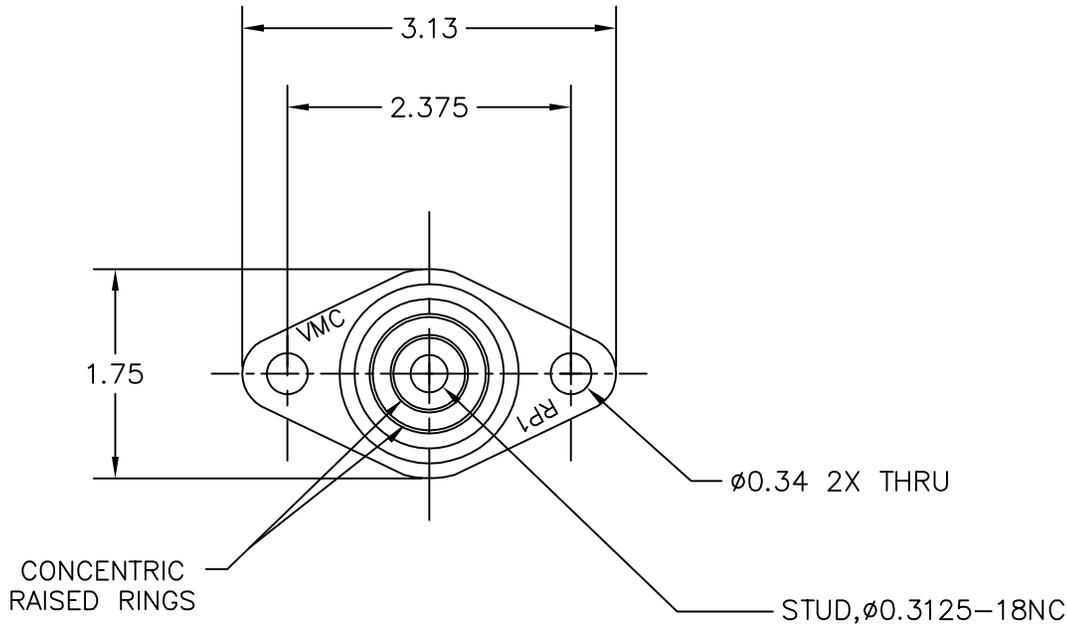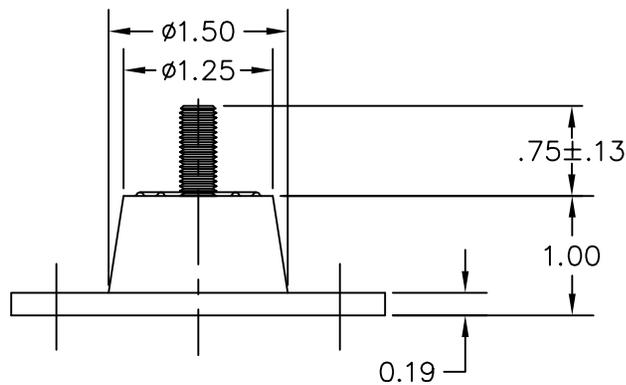

NOTES:

1. DIMENSIONS FOR CUSTOMER REFERENCE
2. TABLE 1 IS AVERAGE DESIGN DATA FOR REFERENCE.
3. MOLDED STEEL AND ELASTOMER MOUNT FOR NON-FAIL SAFE, OUTDOOR SERVICE CONDITIONS.
4. CONSULT VMC FOR APPLICABILITY
- △ CONTACT VMC FOR APPLICABLE RATED LOAD.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.

CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER: _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

**MODEL RP1 35-250 LBS.
 DURULENE ELASTOMERIC ISOLATOR
 WITH POSITIONING PIN
 0.20 INCH DEFLECTION**



THE VMC GROUP
The Power of Together
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE:

NONE

SHEET:



DRAWING NO.:

REVISION