



REV.	DESCRIPTION	DATE	BY

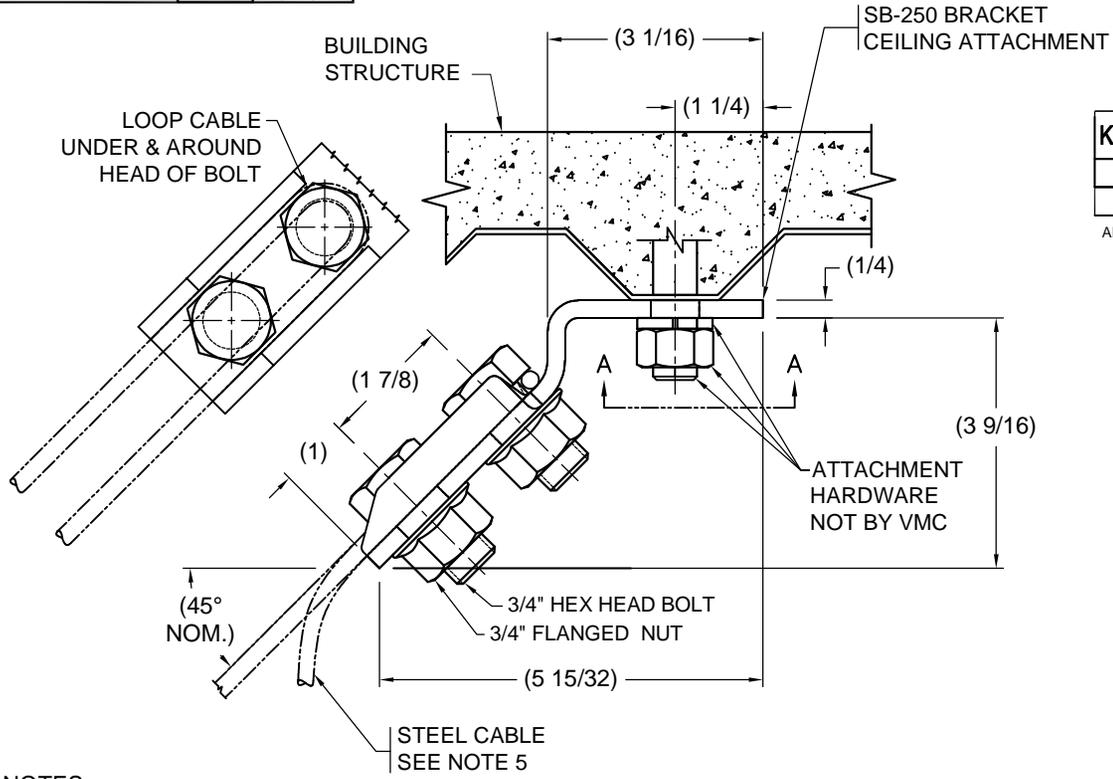


KIT PART NUMBER	"S"	"H"	COLOR CODE	MAX. TENSION ALLOWABLE	KIT TYPE
SB-250-01	15/16"	11/16"	CLEAR ZINC COATED	4020 LBS.	SLOT/HOLE
SB-250-02	-	11/16"	CLEAR ZINC COATED	4400 LBS.	HOLE

ALL RATING AT 45° FOR STEEL ATTACHMENT (LRFD)

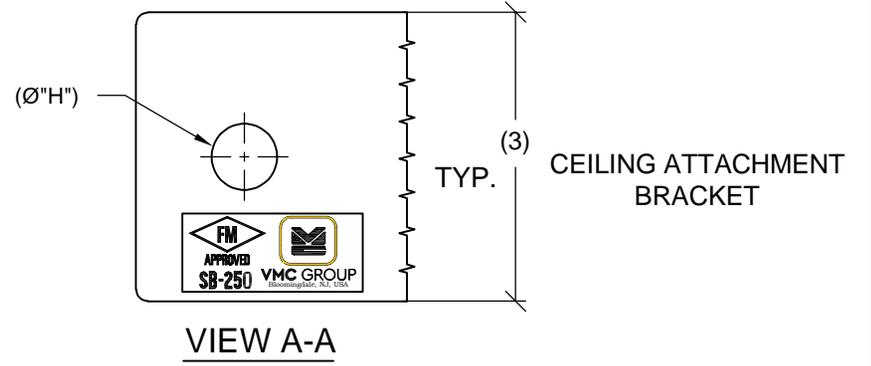

- NOTES:**
- 1) MATERIAL: COLD ROLLED STEEL
 - 2) HARDWARE & BRACKETS ZINC ELECTROPLATE
 - 3) FIELD TORQUE 3/4" LOCK NUTS TO 50 FT- LBS.
 - 4) **SB-250 KITS:**
 - SB-250-01 KIT CONSISTS OF:
 - 2- 11/16 HOLED BRACKETS, 2- 15/16 SLOTTED BRACKETS
 - 8 BOLTS, 8 SERRATED FLANGE NUTS
 - SB-250-02 KIT CONSISTS OF:
 - 4 -11/16 HOLED BRACKETS
 - 8 BOLTS, 8 SERRATED FLANGE NUTS
 - 5) 1/4" CABLE SOLD SEPARATELY PN:140360-25.
 - 6) ALLOWABLE ANCHORAGE TO CONCRETE TO BE CALCULATED ON A JOB BASIS.
 - 7) FM APPROVAL APPLIES ONLY TO INSTALLATIONS USING STRUT OR ANGLE.

APPROVED
 Fixed Equipment Anchorage
 Office of Statewide Health Planning and Development
OPA-1262
 on
Anthony R. Pike
 Anthony R. Pike (916) 654-3362

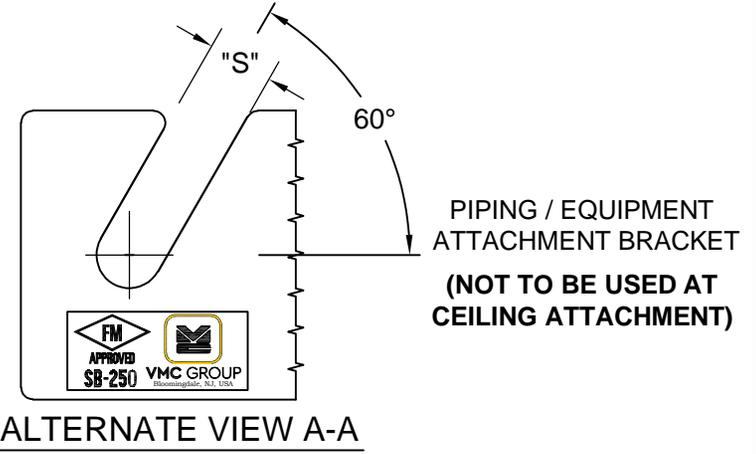

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.



CERTIFIED FOR:

JOB NAME: _____

CUSTOMER: _____

CUSTOMER P.O.: _____

SALES ORDER: _____

**MODEL SB-250 4020-4400 LBS.
 SEISMIC CABLE RESTRAINT KIT**



SCALE:	NONE	Member VISCMA
SHEET:		
DRAWING NO.:		REVISION