


REV.	DESCRIPTION	DATE	BY

KIT PART NUMBER	CABLE LENGTH (FT.)	CABLE COLOR	MAX. TENSION ALLOWABLE (LBS.)	KIT TYPE
SB-250-LRC-513	13	GREEN	2667 OR 2184	15/16" SLOT / 11/16" ANCHOR BRACKET
SB-250-LRC-510	10	GREEN	2667 OR 2184	15/16" SLOT / 11/16" ANCHOR BRACKET
SB-250-LRC-507	7	GREEN	2667 OR 2184	15/16" SLOT / 11/16" ANCHOR BRACKET

- A. RATING AT 45° FOR STEEL ATTACHMENT (LRFD) - 2667#
- B. RATING AT 45° FOR CONCRETE ATTACHMENT - 5/8" HILTI TZ @3-1/8" EMBEDMENT, 5" SLAB MIN - 2184#

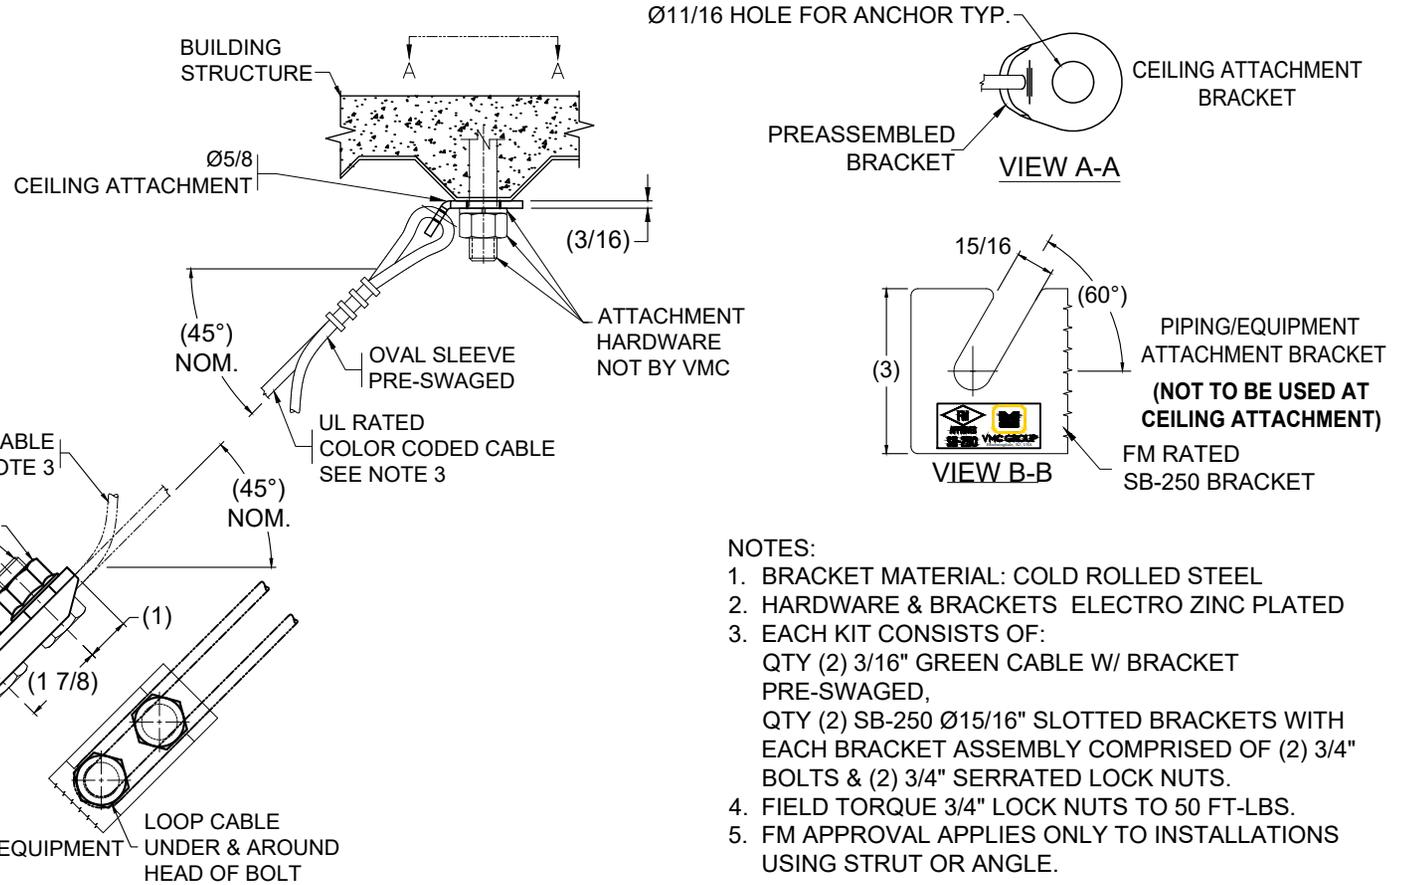

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.



CERTIFIED FOR:

JOB NAME: _____

CUSTOMER: _____

CUSTOMER P.O.: _____

SALES ORDER: _____

**MODEL SB-250-LRC 2667 LBS.
 3/16 INCH GREEN SEISMIC CABLE
 RESTRAINT KIT**



SCALE:	NONE	
SHEET:	1 OF 1	
DRAWING NO.:		REVISION