
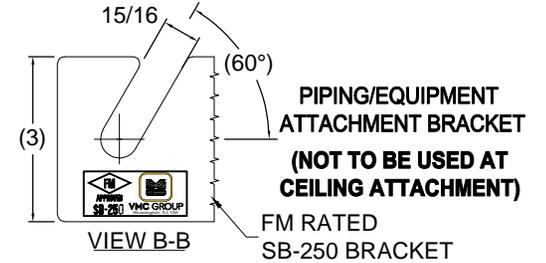
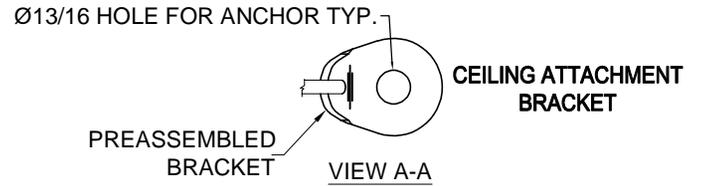


REV.	DESCRIPTION	DATE	BY

KIT PART NUMBER	CABLE LENGTH (FT.)	CABLE COLOR	MAX. TENSION ALLOWABLE (LBS.)	KIT TYPE
SB-250-LRC-610	10	BLACK	3000 OR 4020	15/16" SLOT / 13/16" ANCHOR BRACKET
SB-250-LRC-607	7	BLACK	3000 OR 4020	15/16" SLOT / 13/16" ANCHOR BRACKET

A. RATING AT 45° FOR STEEL ATTACHMENT (LRFD) - 4020#
 B. RATING AT 45° FOR STEEL ATTACHMENT- 3/4" HILTI TZ @3-3/4" EMBEDMENT, 6" SLAB MIN - 3000#

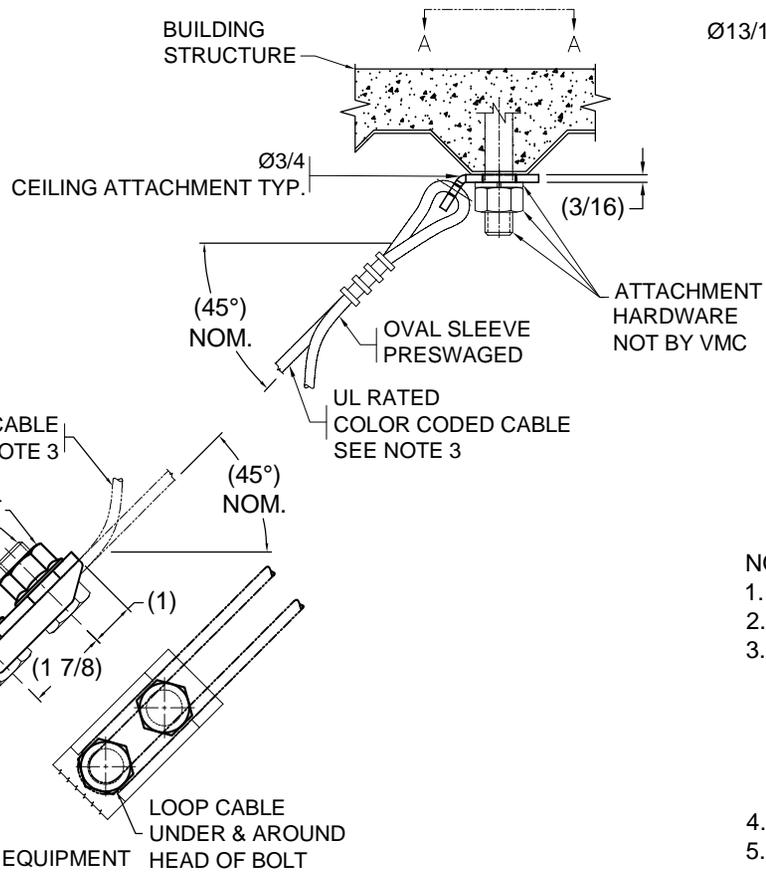

NOTES:

- BRACKET MATERIAL: COLD ROLLED STEEL
- HARDWARE & BRACKETS ELECTRO ZINC PLATED
- EACH KIT CONSISTS OF:
 QTY (2) 1/4" BLACK CABLE W/ BRACKET PRE-SWAGED,
 QTY (2) SB-250 Ø15/16" SLOTTED BRACKETS WITH EACH BRACKET ASSEMBLY COMPRISED OF (2) 3/4" BOLTS & (2) 3/4" SERRATED LOCK NUTS.
- FIELD TORQUE 3/4" LOCK NUTS TO 50 FT-LBS.
- FM APPROVAL APPLIES ONLY TO INSTALLATIONS USING STRUT OR ANGLE.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.



CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER: _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

**MODEL SB-250-LRC 4020 LBS.
 1/4 INCH BLACK SEISMIC CABLE
 RESTRAINT KIT**



VMC GROUP
 THE POWER OF TOGETHER™
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE:

NONE

SHEET:

DRAWING NO.:

REVISION

