
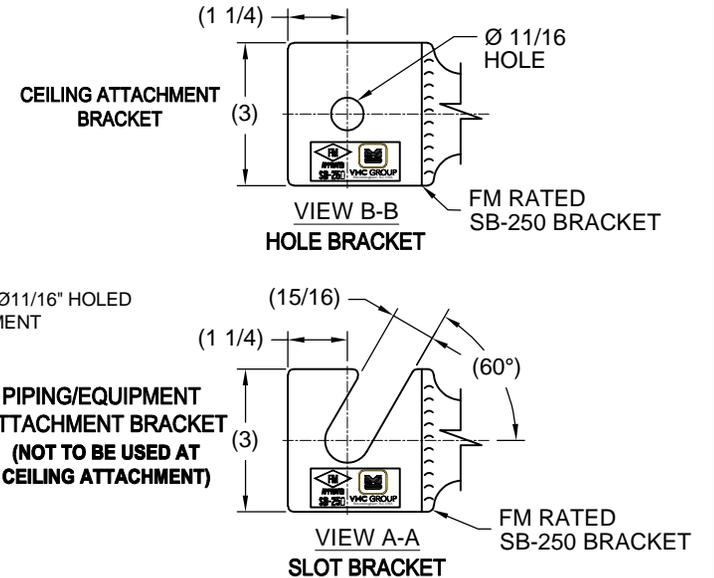


REV.	DESCRIPTION	DATE	BY

KIT PART NUMBER	KIT LENGTH (FT)	CABLE THICKNESS (IN)	MAX. TENSION ALLOWABLE (LBS)	KIT TYPE
SCR-25-07	7	1/4	4400	15/16" SLOT / 11/16" HOLE
SCR-25-14	14			
SCR-25-21	21			

- A. RATING AT 45° FOR STEEL ATTACHMENT (LRFD)
- B. RATING AT 45° FOR CONCRETE ATTACHMENT- 3/4" HILTI TZ @3-3/4" EMBEDMENT, 6" SLAB MIN - 4020#.

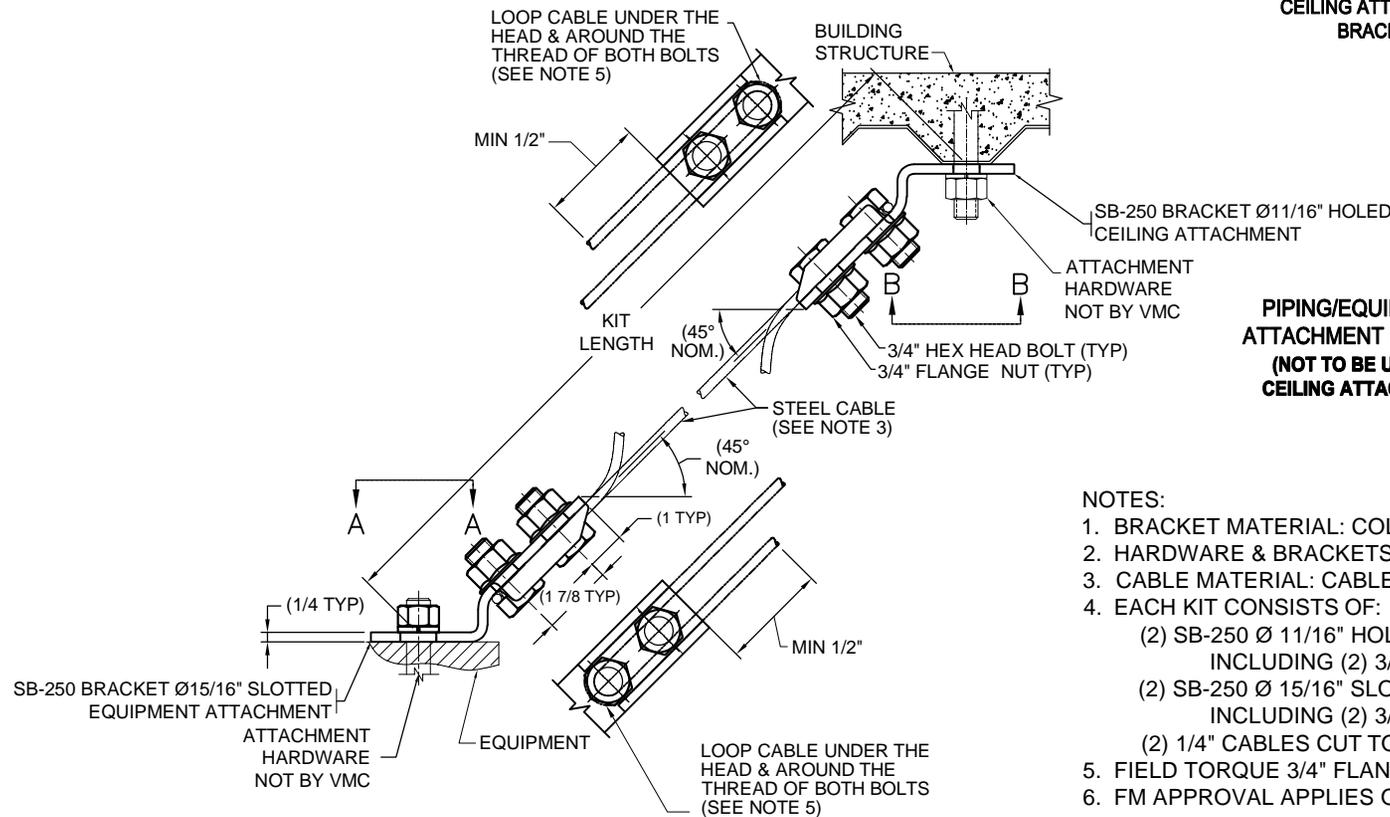

- NOTES:
1. BRACKET MATERIAL: COLD ROLLED STEEL
 2. HARDWARE & BRACKETS CLEAR ELECTRO ZINC PLATED
 3. CABLE MATERIAL: CABLE 1/4" 7x19 GALVANIZED BY FOOT
 4. EACH KIT CONSISTS OF:
 - (2) SB-250 Ø 11/16" HOLED BRACKETS, WITH EACH BRACKET ASSEMBLY INCLUDING (2) 3/4" BOLTS & (2) 3/4" FLANGE NUTS
 - (2) SB-250 Ø 15/16" SLOTTED BRACKETS, WITH EACH BRACKET ASSEMBLY INCLUDING (2) 3/4" BOLTS & (2) 3/4" FLANGE NUTS
 - (2) 1/4" CABLES CUT TO LENGTH
 5. FIELD TORQUE 3/4" FLANGE NUTS TO 50 FT-LBS
 6. FM APPROVAL APPLIES ONLY TO INSTALLATIONS USING STRUT OR ANGLE.

OTHER MATERIALS, COMPOUNDS, OR FINISHES WITH EQUAL OR SUPERIOR PROPERTIES MAY BE SUBSTITUTED AS THEY BECOME AVAILABLE.



CERTIFIED FOR:

JOB NAME: _____
 CUSTOMER: _____
 CUSTOMER P.O.: _____
 SALES ORDER: _____

**MODEL SCR-25
 SB-250 BRACKETS WITH
 1/4 INCH CABLE
 SEISMIC RESTRAINT KIT**



VMC GROUP
 THE POWER OF TOGETHER™
 Bloomingdale, NJ 07403
 Houston, TX 77041

SCALE:	NONE	
SHEET:		
DRAWING NO.:		REVISION